

**Dew point control switches**  
**including strap / with detached sensor head,**  
**with active / switching outputs**

**Patented quality product**  
**(pro-dynamic cross convection patent no. DE 10 2012 015 726.6)**

The dew point control switch **HYGRASREG® TW** is installed on cooling / cold-water piping or on cooled surfaces. It reliably detects formation of dew by means of its humidity and temperature sensor (no conductivity measurement) and, thanks to its patented measuring method, **pro-dynamic cross convection**, yields an exact measurement result (with LED status display), **with / without display**.

Dew point temperature is that temperature at which air reaches the state of saturation and water vapour starts to condensate. Facilitated by the continuous measuring range from 0...100% RH of the **TW-U** and the adjustable switchpoint for the **TW-W** of 75...100% RH, it is possible to operate cooling ceilings, for example, so that the switching output of the dew point control switch, the DDC, is activated and then triggers a heater or other control elements, thereby preventing the formation of dew on pipes or cooling ceilings or on the property to be monitored.

**TW**  
 with quick-locking screws




**TW-extern**  
 with quick-locking screws



**TECHNICAL DATA**

Power supply:	24 V AC (± 20%) and 15...36 V DC
Power consumption:	< 1.1 VA / 24 V DC; < 2.2 VA / 24 V AC
Measuring Range:	formation of dew is detected at 0...100% RH on the <b>TW-U</b> , continuous 75...100% RH on the <b>TW-W</b> , switching (switchpoint adjustable by potentiometer, factory setting 75% RH)
Output:	0-10 V or potential-free changeover contact (24 V), 1 A ohmic load
Sensors:	<b>digital humidity sensor with integrated temperature sensor</b> , small hysteresis, high long-term stability
Sensor protection:	membrane filter
Medium:	clean air and non-aggressive, non-combustible gases
Housing:	plastic, UV-resistant, material polyamide, 30% glass-globe reinforced, with quick-locking screws (slotted / Phillips head combination), colour traffic white (similar to RAL 9016), housing cover is transparent!
Housing dimensions:	72 x 64 x 43.3 mm (Tyr 1)
Cable connection:	<b>cable gland</b> , plastic (M 16 x 1.5; with strain relief, exchangeable, inner diameter 10.4 mm) <b>or</b> <b>M12 connector</b> according to DIN EN 61076-2-101 (optional on request)
Electrical connection:	0.14 - 1.5 mm <sup>2</sup> , via terminal screws
Process connection:	<b>TW</b> endless strap with metal tightener, 300 mm, for pipes up to 3" diameter (included in the scope of delivery)  <b>TW - external</b> cable tie, 200 mm (included in the scope of delivery)
Mounting:	<b>TW</b> with strap for direct mounting on pipes or for direct mounting on flat surfaces (e.g. walls, ceilings)  <b>TW - external</b> with detached sensor head (cable length KL = 2 m) for mounting on pipes
Protection class:	III (according to EN 60 730)
Protection type:	<b>IP65</b> (according to EN 60 529) Housing tested, TÜV SÜD, Report No. 713139052 (Tyr 1)
Standards:	CE conformity according to EMC directive 2014 / 30 / EU
Optional:	two-line <b>display with illumination</b> , cutout approx. 36x15 mm (W x H), for displaying actual humidity and the switching status of the relay

**FUNCTION**  
 The relay output is triggered (contact 13-11 closed)  
 if the **pre-set switchpoint** (factory setting 75% RH)  
 is not reached and opens (contact 12-11 closed)  
 in the event of an error (power failure, condensation).



**LED short pulses =**  
 relay active → switchpoint not reached  
 ACTUAL humidity < pre-set switchpoint (no condensation)

**LED long pulses =**  
 relay inactive → switchpoint exceeded  
 ACTUAL humidity > pre-set switchpoint (condensation)



S+S REGELTECHNIK



HYGRASREG® TW

Dew point control switches  
including strap/with detached sensor head,  
with active/switching outputs



Dimensional drawing

TW

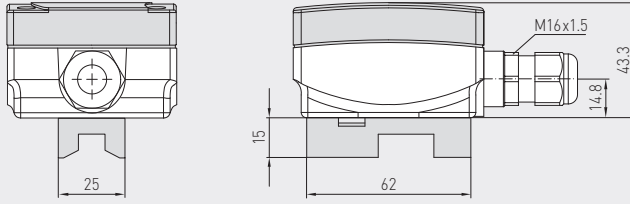

M12 connector  
(optional on request)





TW

with display  
and quick-locking screws



Dimensional drawing

TW-external

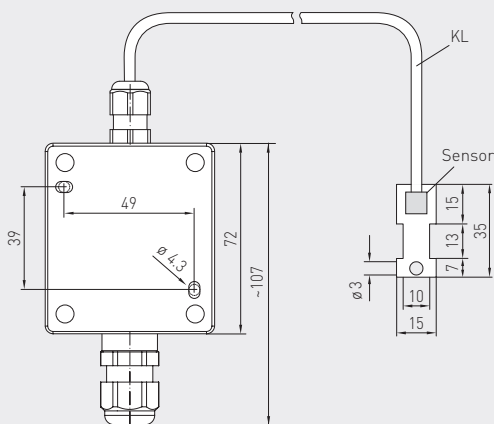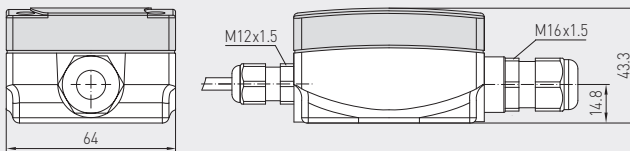

M12 connector  
(optional on request)


TW-extern

with display  
and quick-locking screws



Dew point control switches including strap / with detached sensor head, with active / switching outputs

TW pro-dynamic cross convection

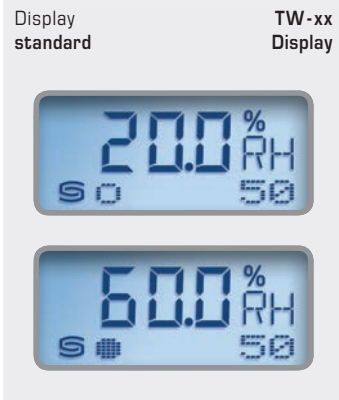









By default, the first line of the display shows the **relative humidity**.

The second line shows the information about the **switching status of the relay** (as a circuit) on the left, and the respective **switching value** in % RH on the right (switchpoint adjustable by potentiometer, factory setting 75 % RH).

- **Circuit, empty** = relay in idle state
- **Circuit, full** = relay energised



**PATENTED**

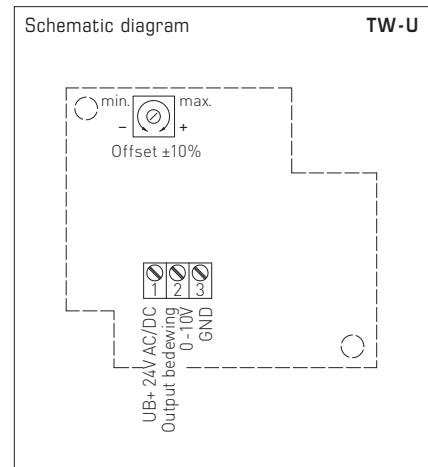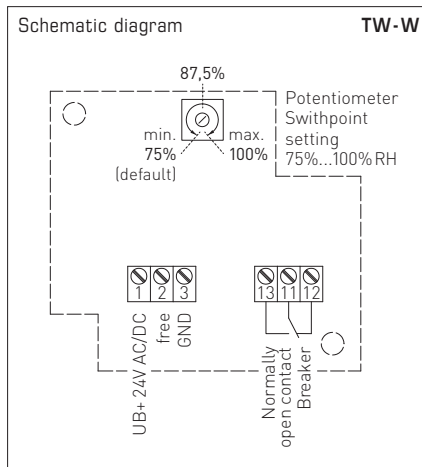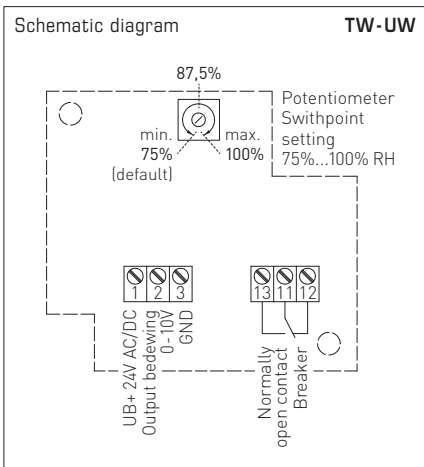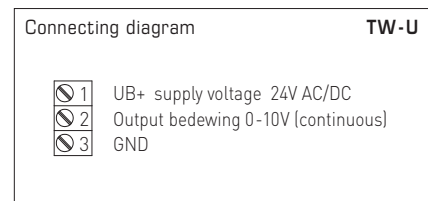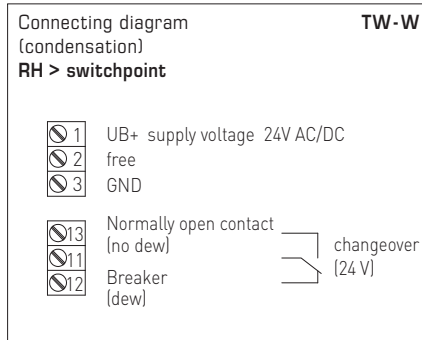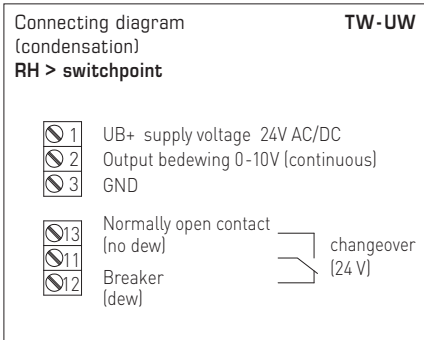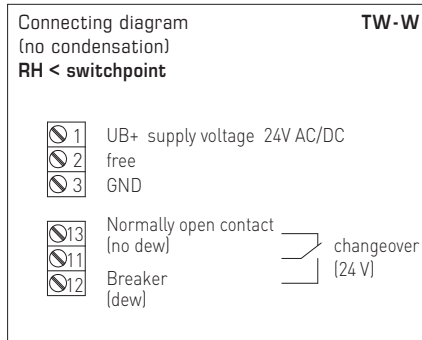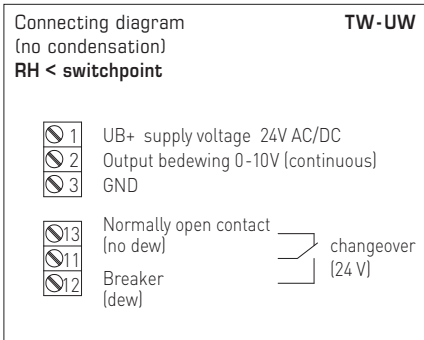



S+S REGELTECHNIK

HYGRASREG® TW

Dew point control switches including strap/with detached sensor head, with active/switching outputs

TW  
with display



TW-external  
with display



HYGRASREG® TW

Dew point control switches including strap (± 3%), *Deluxe*

HYGRASREG® TW-external

Dew point control switches with detached sensor head (± 3%), *Deluxe*

Type/ WG01	Measuring Range Humidity	Output Humidity	Mounting	Display	Item No.	Price
<b>TW</b>			<b>Sensor internal</b>		<b>IP 65</b>	
TW-W	75...100% RH	Changeover contact	for mounting directly on pipes		1202-1015-0001-000	<b>136,03 €</b>
TW-W LCD	75...100% RH	Changeover contact	for mounting directly on pipes	■	1202-1015-1201-020	<b>189,39 €</b>
TW-U	0...100% RH	0-10 V	for mounting directly on pipes		1201-1011-1001-020	<b>141,20 €</b>
TW-U/W	0...100% RH	0-10 V + Changeover contact	for mounting directly on pipes		1202-1012-1001-020	<b>161,92 €</b>
TW-U/W LCD	0...100% RH	0-10 V + Changeover contact	for mounting directly on pipes	■	1202-1012-1201-020	<b>215,31 €</b>
<b>TW-external</b>			<b>Sensor external</b>		<b>IP 65</b>	
TW-W-extern	75...100% RH	Changeover contact	for mounting on pipes		1202-1015-0021-030	<b>174,88 €</b>
TW-W-extern LCD	75...100% RH	Changeover contact	for mounting on pipes	■	1202-1015-0221-030	<b>228,24 €</b>
Optional:	Cable connection with <b>M12 connector</b> according to DIN EN 61076-2-101				on request	